



TO-220F



MBRF3040CT-MBRF30200CT

Features:

- Low power loss, high efficiency.
- High surge capacity
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.
- Metal silicon junction, majority carrier conduction.
- High current Capability, low forward voltage drop.
- Guard ring for over voltage protection.

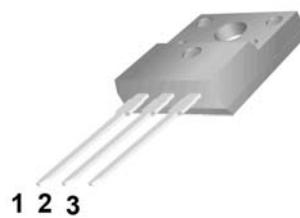

1.Anode 2.Cathode 3.Anode

Absolute Maximum Ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	MBRF 3040 CT	MBRF 3045 CT	MBRF 3050 CT	MBRF 3060 CT	MBRF 3080 CT	MBRF 3090 CT	MBRF 30100 CT	MBRF 30150 CT	MBRF 30200 CT	Unit
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	40	45	50	60	80	90	100	150	200	V
Maximum RMS Voltage	V _{RMS}	28	31.5	35	42	56	63	70	105	140	
Maximum DC Blocking Voltage	V _{R(DC)}	40	45	50	60	80	90	100	150	200	
Maximum Average Forward Current	I _{F(AV)}						30				A
Peak Forward Surge Current:8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}						275				
Maximum Forward Voltage at 15A per leg	V _F		0.7		0.75			0.85		0.95	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	T _j =25°C	I _R					0.1				mA
	T _j =125°C						20				
Maximum Operating Junction Temperature	T _j		150					175			°C
Storage Temperature	T _{stg}		-55~+150					-65~+175			
Typical Thermal Resistance	R _{θJC}					1.4					°C/W

Typical Characteristics

RATING AND CHARACTERISTIC CURVES

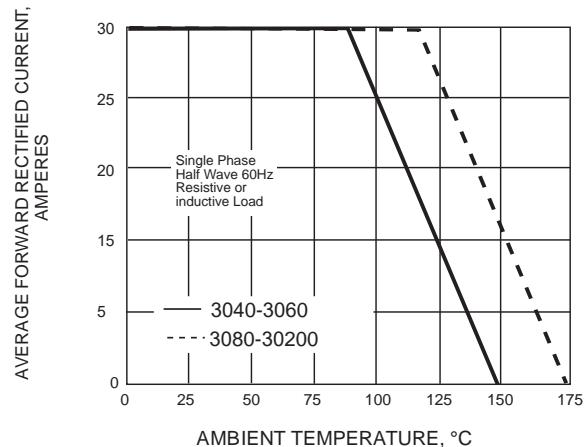


Fig.1 FORWARD CURRENT ERATING CURVE

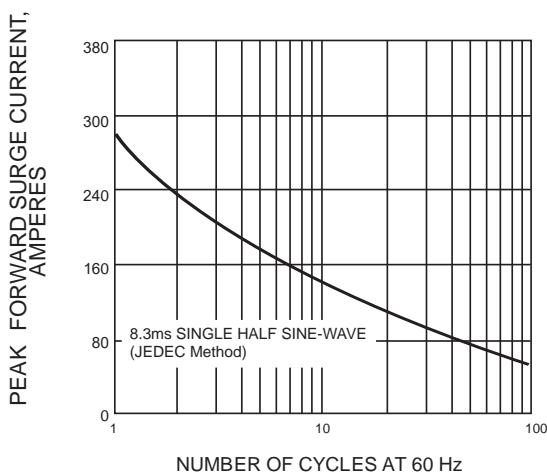


Fig.2 MAXIMUM NON-REPETITIVE SURGE CURRENT

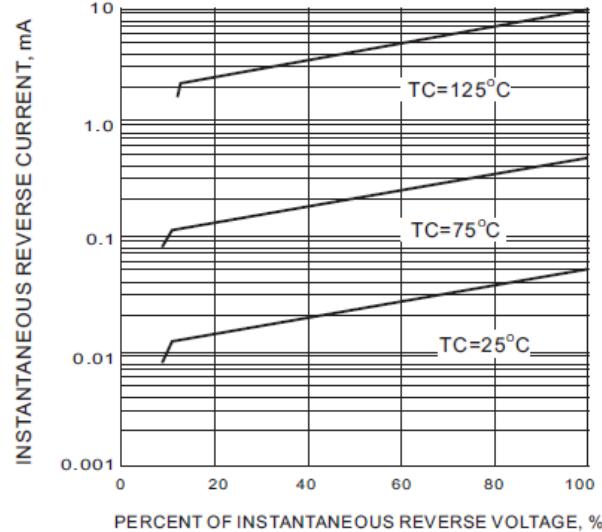


Fig.3 TYPICALREVERSE CHARACTERISTIC


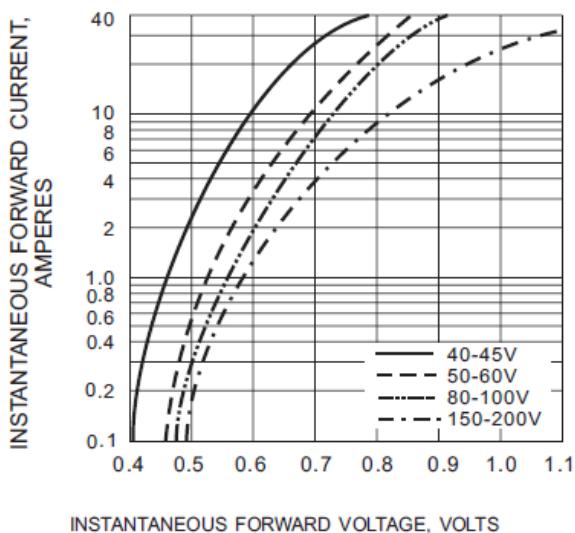


Fig.4 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

Packge Dimension

TO-220F

Unit: mm

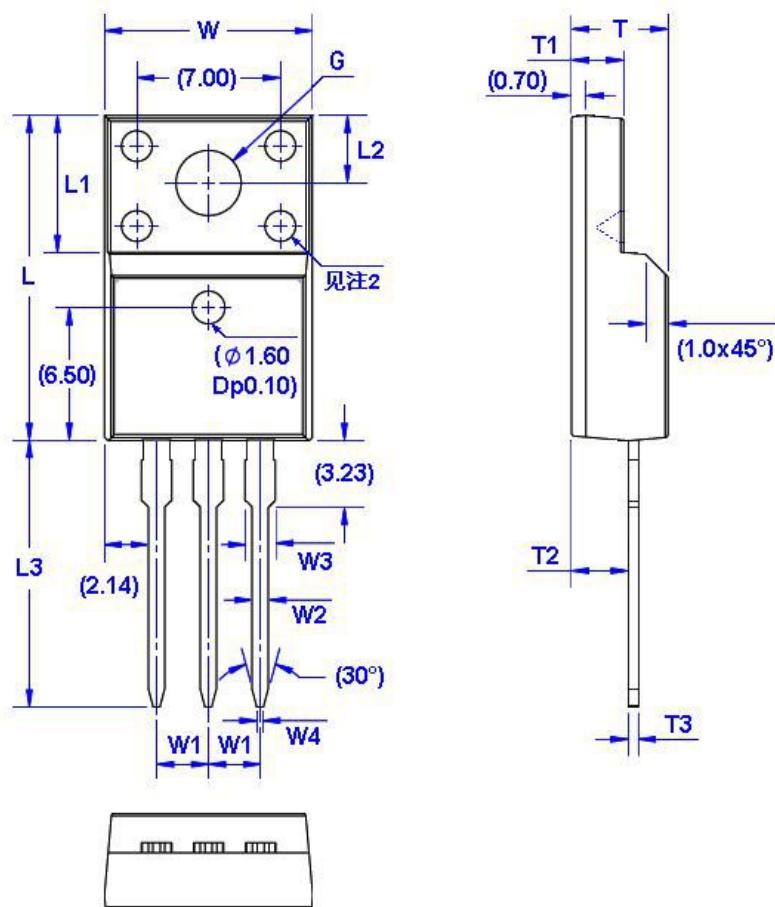

Symbol	Size		Symbol	Size		Symbol	Size		Symbol	Size	
	Min	Max		Min	Max		Min	Max		Min	Max
W	9.96	10.36	W4	0.25	0.45	L3	12.78	13.18	T3	0.45	0.60
W1	2.54 (TYP)		L	15.67	16.07	T	4.50	4.90	G(Φ)	3.08	3.28
W2	0.70	0.90	L1	6.48	6.88	T1	2.34	2.74			
W3	1.24	1.47	L2	3.20	3.40	T2	2.56	2.96			