


Description

The XXW50P10 uses advanced trench technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. It can be used in a wide variety of applications.



General Features

$V_{DS} = -100V, I_D = -50A$


$R_{DS(ON)} < 50m\Omega @ V_{GS} = -10V$ (Typ: 42m Ω)

Super high dense cell design

Advanced trench process technology

Reliable and rugged


High density cell design for ultra low on-resistance



Application

Power switch

DC/DC converters



Absolute Maximum Ratings ($T_c=25^\circ C$ unless otherwise noted)

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	-100	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D @ T_c = 25^\circ C$	Continuous Drain Current, $V_{GS} @ -10V^1$	-50	A
$I_D @ T_c = 100^\circ C$	Continuous Drain Current, $V_{GS} @ -10V^1$	-23	A
I_{DM}	Pulsed Drain Current ²	-100	A
EAS	Single Pulse Avalanche Energy ³	345	mJ
I_{AS}	Avalanche Current	28	A
$P_D @ T_c = 25^\circ C$	Total Power Dissipation ⁴	104	W
T _{STG}	Storage Temperature Range	-55 to 150	°C
T _J	Operating Junction Temperature Range	-55 to 150	°C
R _{θJA}	Thermal Resistance Junction-Ambient ¹	62	°C/W
R _{θJC}	Thermal Resistance Junction-Case ¹	1.2	°C/W

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BVDSS	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =-250uA	-100	---	---	V
R _{DSON}	Static Drain-Source On-Resistance ²	V _{GS} =-10V , I _D =-10A	---	42	50	mΩ
		V _{GS} =-4.5V , I _D =-8A	---	46	55	
V _{Gsth}	Gate Threshold Voltage	V _{GS} =V _{DS} , I _D =-250uA	-1.2	-1.8	-2.5	V
I _{DSS}	Drain-Source Leakage Current	V _{DS} =-100V , V _{GS} =0V , T _J =25°C	---	---	-50	uA
I _{GSS}	Gate-Source Leakage Current	V _{GS} =±20V , V _{DS} =0V	---	---	±100	nA
g _{fs}	Forward Transconductance	V _{DS} =-10V , I _D =-10A	---	32	---	S
Q _g	Total Gate Charge	V _{DS} =-80V , V _{GS} =-10V , I _D =-14A	---	92	---	nC
Q _{gs}	Gate-Source Charge		---	17.5	---	
Q _{gd}	Gate-Drain Charge		---	14	---	
T _{d(on)}	Turn-On Delay Time	V _{DD} =-50V , V _{GS} =-10V , R _G =3.3 , I _D =-14A	---	20.5	---	ns
T _r	Rise Time		---	32.2	---	
T _{d(off)}	Turn-Off Delay Time		---	123	---	
T _f	Fall Time		---	63.7	---	
C _{iss}	Input Capacitance	V _{DS} =-25V , V _{GS} =0V , f=1MHz	---	6516	---	pF
C _{oss}	Output Capacitance		---	223	---	
C _{rss}	Reverse Transfer Capacitance		---	125	---	
I _s	Continuous Source Current ^{1,5}	V _G =V _D =0V , Force Current	---	---	-35	A
V _{SD}	Diode Forward Voltage ²	V _{GS} =0V , I _s =-1A , T _J =25°C	---	---	1.2	V
t _{rr}	Reverse Recovery Time	I _F =-14A , di/dt=-100A/μs , T _J =25°C	---	31.2	---	nS
Q _{rr}	Reverse Recovery Charge		---	31.97	---	nC

Note :

- 1.The data tested by surface mounted on a 1 inch FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width \leq 300us , duty cycle \leq 2%
- 3.The EAS data shows Max. rating . The test condition is V^{DD}=-25V,V^{GS}=-10V,L=0.88mH,I^{AS}=-28A
- 4.The power dissipation is limited by 150°C junction temperature
- 5 .The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Typical Characteristics

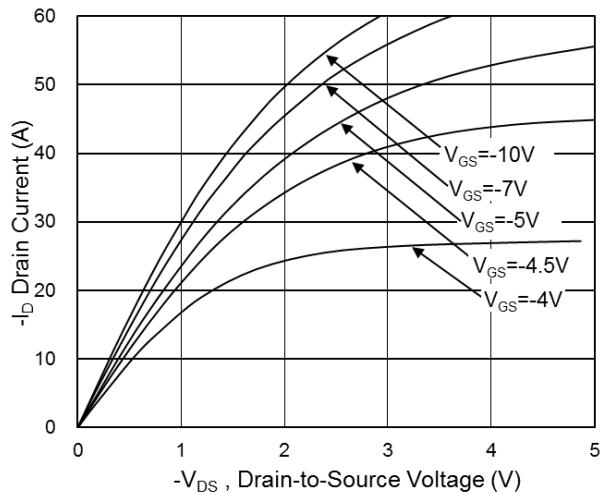


Fig.1 Typical Output Characteristics

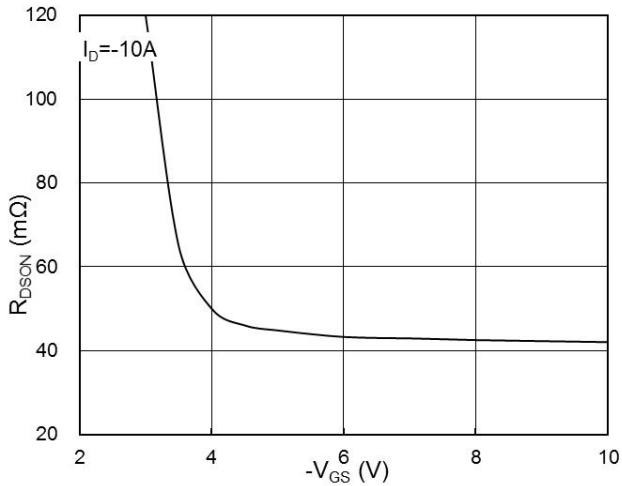


Fig.2 On-Resistance vs. G-S Voltage

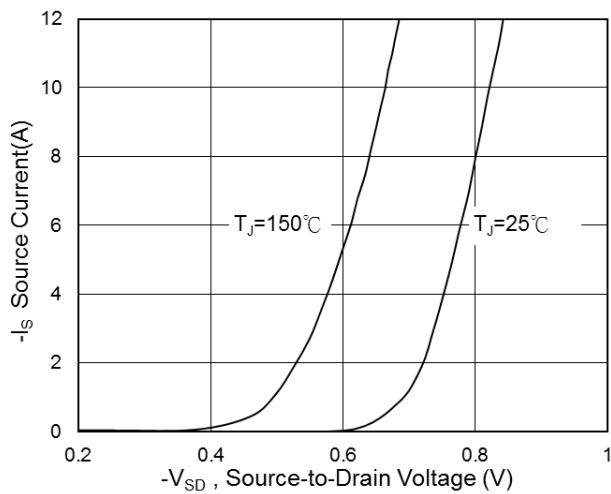


Fig.3 Typical S-D Diode Forward Voltage

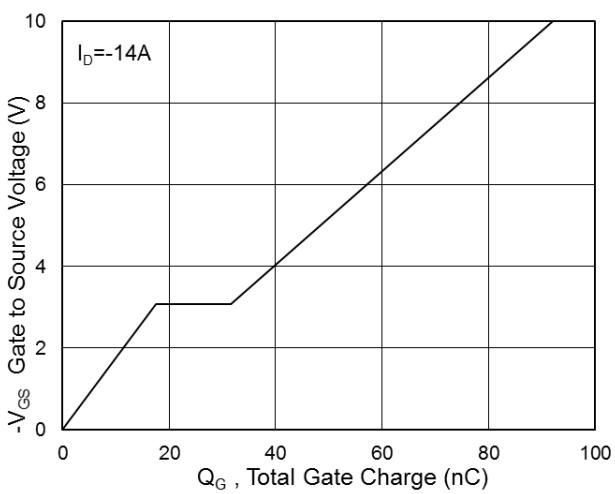


Fig.4 Gate-Charge Characteristics

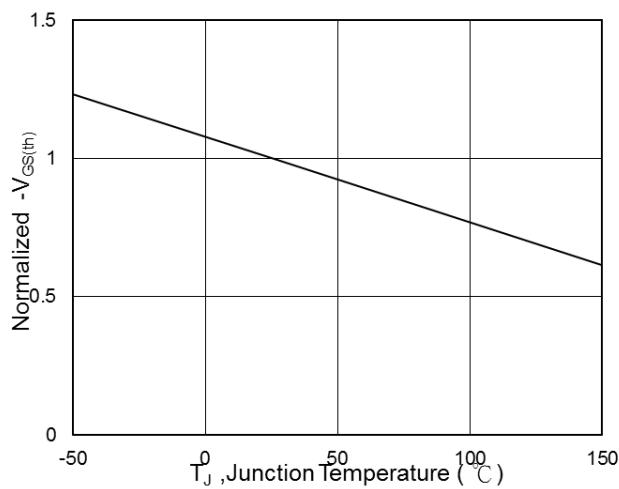


Fig.5 Normalized $V_{GS(th)}$ vs. T_J

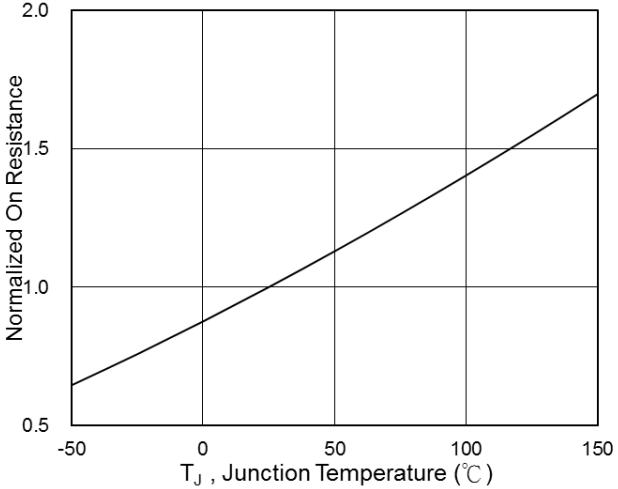
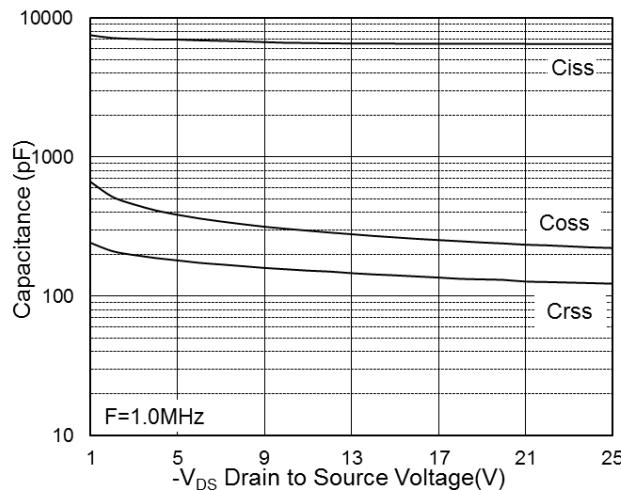
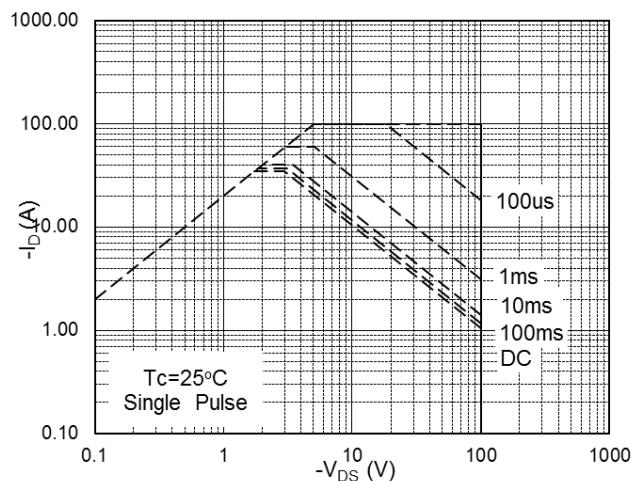
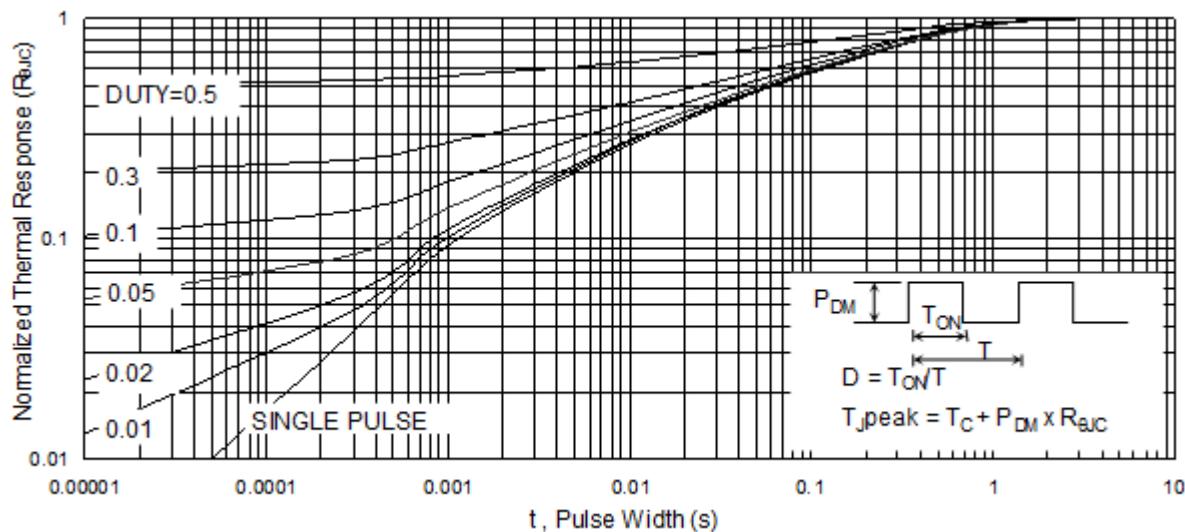
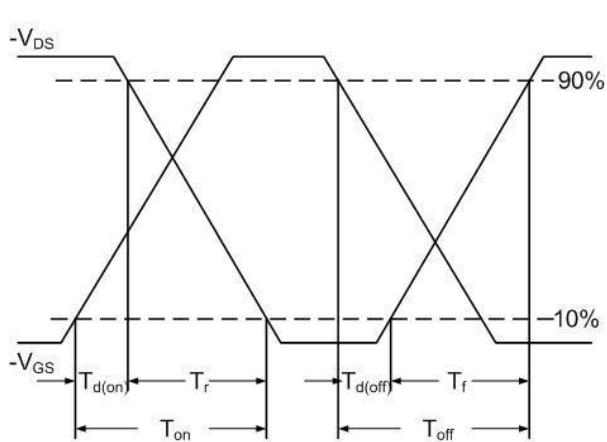
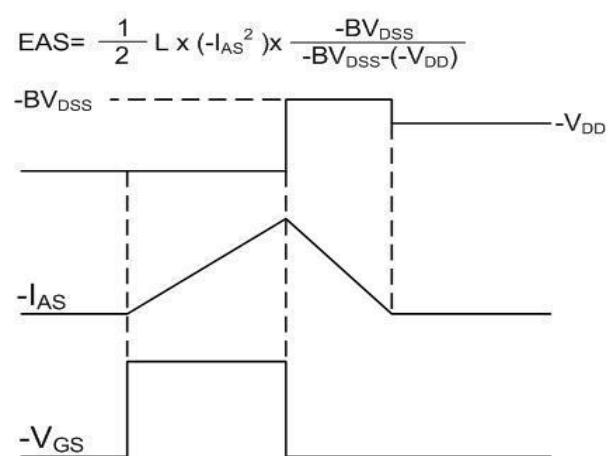
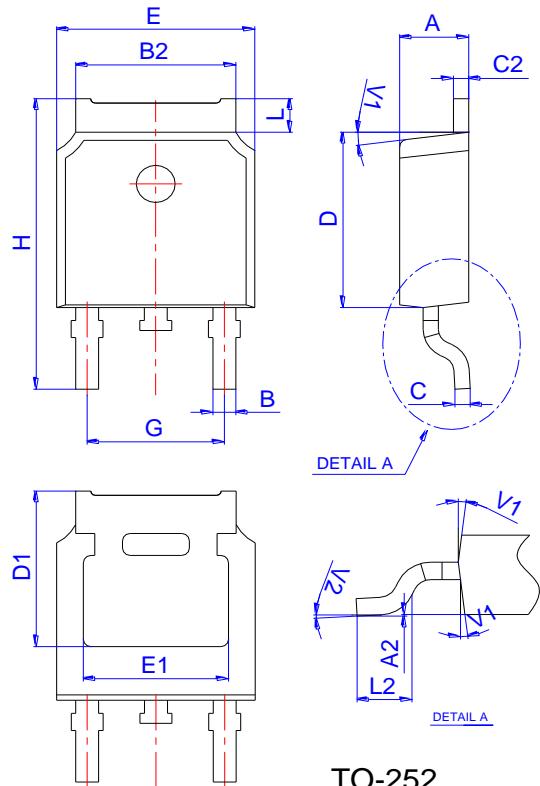


Fig.6 Normalized $R_{DS(on)}$ vs. T_J

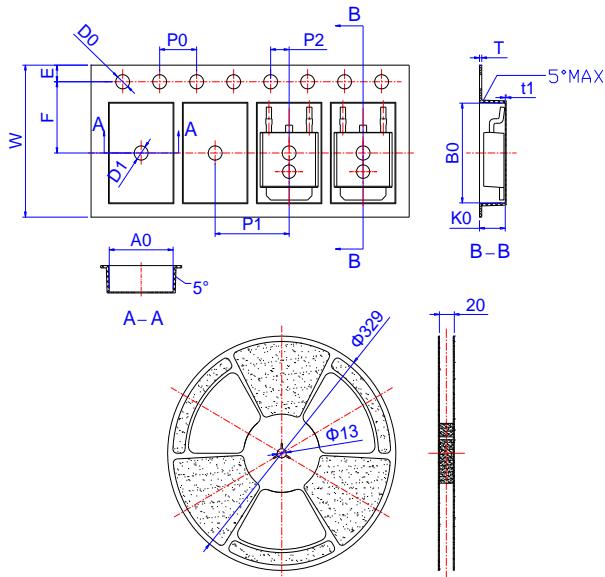

Fig.7 Capacitance

Fig.8 Safe Operating Area

Fig.9 Normalized Maximum Transient Thermal Impedance

Fig.10 Switching Time Waveform

Fig.11 Unclamped Inductive Waveform

Package Mechanical Data



Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.10		2.50	0.083		0.098
A2	0		0.10	0		0.004
B	0.66		0.86	0.026		0.034
B2	5.18		5.48	0.202		0.216
C	0.40		0.60	0.016		0.024
C2	0.44		0.58	0.017		0.023
D	5.90		6.30	0.232		0.248
D1	5.30REF			0.209REF		
E	6.40		6.80	0.252		0.268
E1	4.63			0.182		
G	4.47		4.67	0.176		0.184
H	9.50		10.70	0.374		0.421
L	1.09		1.21	0.043		0.048
L2	1.35		1.65	0.053		0.065
V1		7°			7°	
V2	0°		6°	0°		6°

Reel Specification-TO-252



Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
W	15.90	16.00	16.10	0.626	0.630	0.634
E	1.65	1.75	1.85	0.065	0.069	0.073
F	7.40	7.50	7.60	0.291	0.295	0.299
D0	1.40	1.50	1.60	0.055	0.059	0.063
D1	1.40	1.50	1.60	0.055	0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	7.90	8.00	8.10	0.311	0.315	0.319
P2	1.90	2.00	2.10	0.075	0.079	0.083
A0	6.85	6.90	7.00	0.270	0.271	0.276
B0	10.45	10.50	10.60	0.411	0.413	0.417
K0	2.68	2.78	2.88	0.105	0.109	0.113
T	0.24		0.27	0.009		0.011
t1	0.10			0.004		
10P0	39.80	40.00	40.20	1.567	1.575	1.583